



222 Cavalcade Street, 77009-3213 P.O. Box 8768, Houston, Texas 77249-8768 Tel: (713) 692-9151 Fax: (713) 696-6205

<u>Attention:</u> J'Lynn Hare Rumber Materials, Inc.

621 West Division Street Muenster, TX 76252

P: 940-759-4181 / F: 940/759-4011

W/O. No.:

RUM004-10-19-35775-1

P.O. No.:

Report Date: 10/26/2007


Rumber Boards - Plain vs. Fiberwrap

Identification: 9104 Boards

Description: 1-1/2" x 7" tested on 18" beam centers

Plain Board		Fiberwrap	
Load (lbs)	Deflection (in.)	Load (lbs)	Deflection (in.)
840	0.200	840	0.105
1,510	0.365	1,510	0.220
1,825	0.645	1,825	0.400

Loading was stopped at 1,825 lbs. at beginning of separation and cracking of fiberwrap.

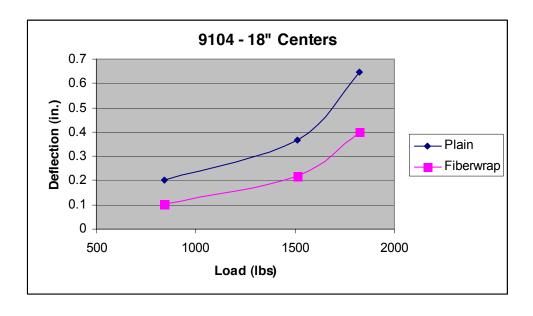

Our letters and reports are for the exclusive use of the client to whom they are addressed and shall not be reproduced except in full without the approval of the testing laboratory. The use of our name must receive our written approval. Our letters and reports apply only to the sample tested and/or inspected, and are not indicative of the quantities of apparently identical or similar products. Material submitted to our metals department will be discarded after a period of 30 days unless otherwise directed.

Respectfully Submitted

Terry Wilt

Manager, Product Evaluation

Stork SWL, is an operating unit of Stork Materials Technology B.V., Amsterdam, The Netherlands, which is a member of the Stork group